

## SUBWOOFERS

# SUB Powered Subwoofers



SUB powered subwoofers for extra low frequency sound reproduction.

# SUB 2

200W active subwoofer with front mounted high quality 10" glass aramid composite woofer.  
Strong bass output with 90 dB sensitivity. Small size and strong bass output will complement  
any installation where extra low frequencies are required.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

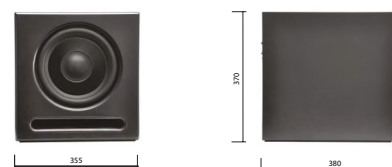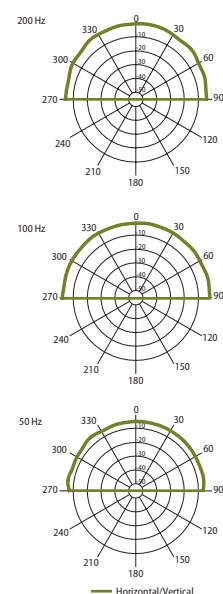

| Technical Specifications | SUB 2  |
|--------------------------|--|
| Rated power              | 200 W  |
| Frequency response       | 20 Hz - 130 Hz   |
| Low pass filter          | 50 Hz - 130 Hz   |
| Maximum SPL              | 120 dB   |
| Dispersion at 100 Hz     | 180° conical   |
| Driver dimensions        | 10" (254mm) woofer   |
| Input gain control       | - 6 dBu - +3 dBu   |
| Inputs                   | Stereo RCA, balanced stereo 6,3 mm TRS JACK, balanced stereo XLR |
| Dimensions               | 355 mm x 380 mm x 370 mm   |
| Weight                   | 12 kg  |
| Material                 | Painted MDF  |
| Colour                   | Black (RAL 9017)   |

