



L-STAGE FRESNEL SL-2 SD



L-STAGE FRESNEL SL-2 SD is a professional LED fixture with high-effective optical system and white color light source. The fixture is with high CRI and high power light output. Color temperature is the 3 200 K or 5 600 K depending on the model type. Electronic zoom range from 15° to 60°. Perfect choice for theatre and TV studios.

PRODUCT CODES:

L-SLS2SDWW – warm white 3 200 K version

L-SLS2SDCW – cold white 5 600 K version

TECHNICAL SPECIFICATION

OPTICAL SYSTEM

Light source: 300 W LED
LED source lifetime: 50 000 hours
CCT: 1 800 K–10 000 K
CRI: Ra 96.1 (3 200 K, 5 600 K)
Beam angle: 15°–60°

CONTROL SYSTEM

Protocols: DMX512, RDM
Dimmer: 0–100 % 16 Bit
Display: On board Control, 0–25 Hz Strobe
DMX channels: UNO (1ch), DOS (2chs), STD.P (5 chs)

ELECTRICAL SPECS


Voltage: 100–240 V AC, 50/60 Hz
Max. power: 180 W
Power Connection: Power in and out
DMX XLR: DMX in and out

PHYSICAL SPECS


IP rating: IP20
Ambient temp: 0°C–45°C
Body: Extruded aluminum, black colour
Cooling: Forced Convection
Size: 417 x 286 x 260 mm
Weight: 6.6 kg

PHOTOMETRICS


SS5252SWD

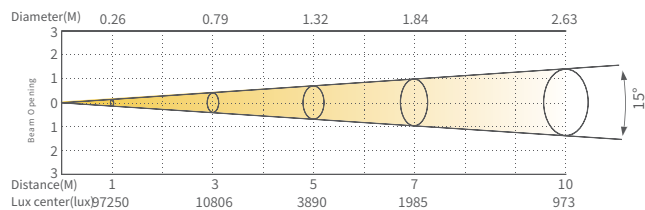


SS5252SCD

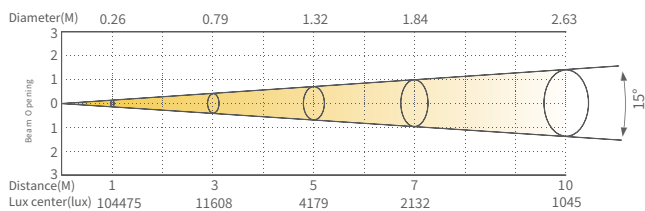


Diameter(M) 1.15 3.46 5.77 8.08 11.55

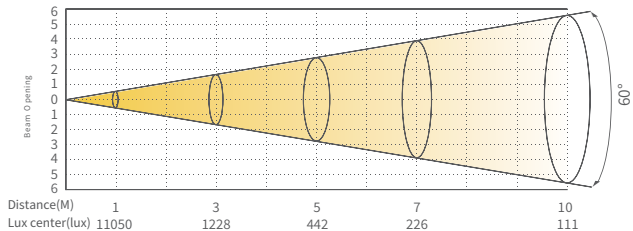


Diameter(M) 1.15 3.46 5.77 8.08 11.55

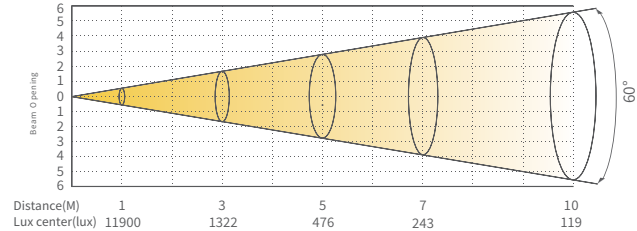

ACCESSORIES (not included)



Barn doors

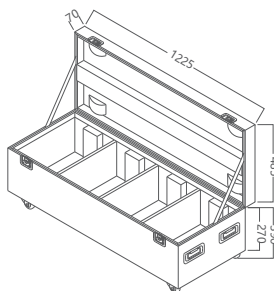

4 unit flight case

DIMENSIONS

